

i-10

Heavy Duty Two Post Lifts 10,000 lbs. Capacity




Model Shown:
FWD I10N100MBL
10,000 lbs. capacity

Features:

- Spot-Rite™ 3-stage front arms
 - Spot vehicles asymmetrically or symmetrically
- Hydraulic cylinders in each column:
 - Direct pull lifting technology
 - Top mounted
 - Full stroke
 - Cylinder rod concealed inside carriage
- Single point lock release
- Includes adapter extensions and storage bracket
- Five years structural 18 month parts, and six month labor warranty
- ALL certified

Low-Profile Adapter Design:

The I10 features low-profile, oversized pads with multiple extensions to raise most vehicles on the road today. Includes four (each) adapter extensions at 1.75", 3.5", 5"

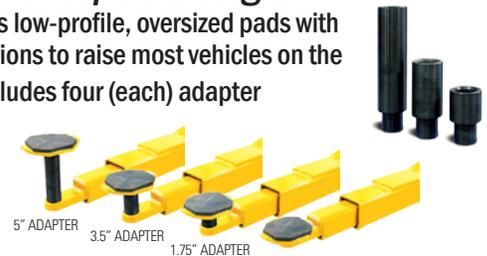


Specifications	I10N100MBL
Capacity	10,000 lbs. (4535kg)
Rise	76-1/8" (1934mm)
Overall Height	143" (3632mm)
Overall Width	131" or optional 137" (3327/4380mm)
Drive through clearance	99" or optional 105" (2515/2667mm)
Overhead switch height	137-5/8" (3496mm)
Front reach (Min/Max)	23" / 44-1/2" (584mm/1130mm)
Rear reach (Min/Max)	36" / 58" (914mm / 1473mm)
Min/Max adapter height	3-5/8" (792mm) no adapter extension 8-5/8" (219mm) w/5" adapter extension
Width inside column	109" or optional 115" (2769mm / 2921mm)
Voltage/Amps	208/230, 15 amps; 208/230, 16 amps
Motor/phase	1ph*/2HP/50Hz; 1ph*/2HP/60Hz
Ceiling height required	144" (3658mm)

Specifications subject to change without notice or liability. *3-phase available at additional cost Available in red

I10 Spot-Rite™ 3-Stage Front Arm Design

Position the vehicle doors in front of or behind the lift columns to prevent door damage and allow easy technician access!

Spot-Rite™ 3-Stage Front Arms accommodate vehicles both symmetrically and asymmetrically. This feature allows the technician to position the vehicle doors in front of or behind the column to prevent door damage.

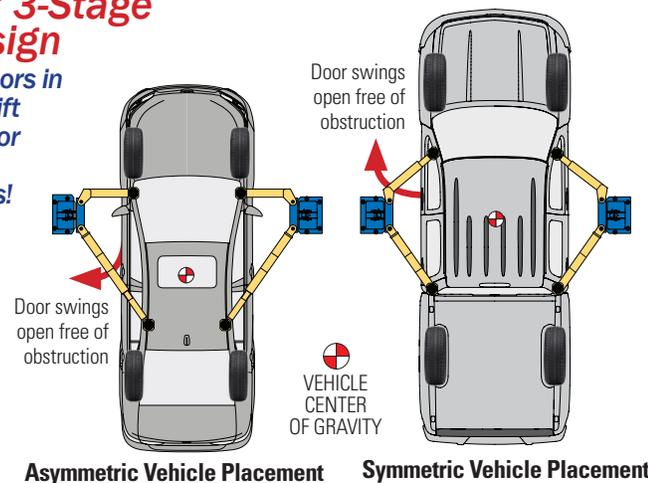

Asymmetric Vehicle Placement

Symmetric Vehicle Placement